




HOSTAPHAN®

Hostaphan® GUV 4600 can easily be coated or printed with functional layers. The film is slip coated for high speed processing.

GUV 4600: one side treated, treated side wound out.

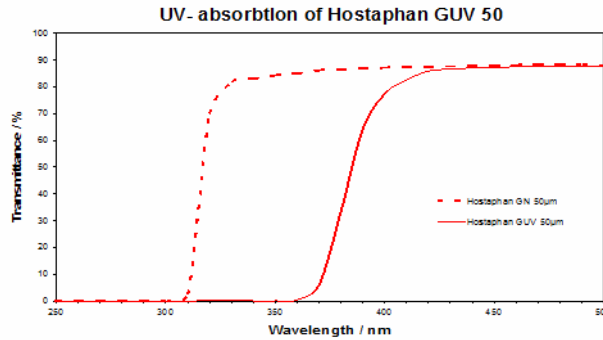

Delivery program Hostaphan® GUV 4600

| Thickness μm | Yield | | Roll length <i>m</i> | Roll-diameter <i>mm</i> |
|----------------------------|-----------------------|------------------------|-------------------------|----------------------------|
| | g/m^2 | m^2/kg | | |
| 50 | 70 | 14 | On request | On request |

Core diameter: 152.4 mm (6").

Rolls are supplied with knurls (15 mm each side).

This data sheet reflects our state of knowledge at the time this was prepared. The purpose is to provide an overview of the characteristics of our products and their potential uses. The values given reflect the typical characteristics of the film. They are not specification limits. They are neither a guarantee of specific properties nor the suitability of products in specific applications. The user must observe industrial property rights, such as patents or trademarks. The quality of our products is covered by the terms of the General Conditions of Sale of MITSUBISHI POLYESTER FILM GmbH.

Edition 04/17

